LowPro Safe Cover - 1200 x 800mm.





Suggested Uses.


- Ideal for covering trenches/holes across areas that require pedestrian or wheelchair access
- Safely cover holes and trenches up to 700mm
- Support pedestrians & vehicles up to 1600kg

Benefits.

- · Can be easily installed, transported and stored
- Rubber edges prevent the covers from moving on the ground and protect the board against cracking.

Useful Tip.

Designed to be laid loose, but can be fixed in each corner for longer term applications

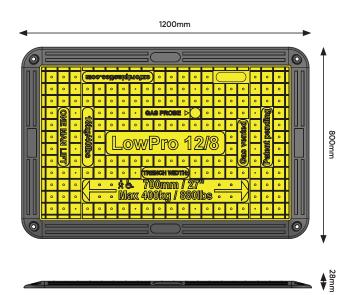

Specifications.

Code	49-SC1280LP
Description	LowPro Safe Cover - 1200 x 800mm
Max Hole Span	Holes/trenches up to 700mm wide
Max Load	1600kg
Material	Composite Plate with Rubber Edge
Height	28mm
Width	800mm
Length	1200mm
Weight	17kg
Fixings	4, one in each corner

Fixings.

49-FB	M10 x 75mm Coachscrew and Plug
49-CF10	M10 x 75mm Anka Bolt

Installation.

49-FB: Asphalt Surface

Drill 14mm dia x 75mm deep hole into asphalt, tap nylon plug into hole. Wind coachscrew into place

49-CF10: Concrete Surface:

Drill 12mm dia x 100mm deep hole into concrete, clear out dust, insert bolt and tighten.





Scan here to view the webpage.

