LowPro Safe Cover - 1500 x 1000mm.





Suggested Uses.


- Ideal for covering trenches/holes across driveways or areas that require vehicle access
- Support pedestrians & vehicles up to 3500kg

Benefits.

- A great alternative to heavy steel plates with a non-conductive composite construction
- Can be easily installed, transported and stored with only 2 people
- Flexi-Edges are moulded around the whole board, creating a safe passageway for pedestrians, wheelchairs and vehicles

Useful Tip.

Designed to be laid loose, but can be fixed in each corner for longer term applications

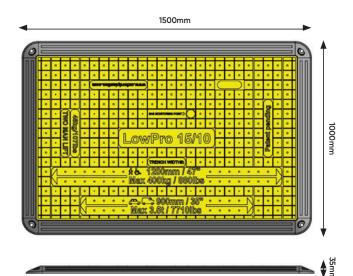

Specifications.

Code	49-SC1510
Description	LowPro Safe Cover - 1500 x 100mm
Max Hole Span	Holes/trenches up to 900mm wide
Max Load	3500kg
Material	Composite Plate with Rubber Edge
Height	35mm
Width	1000mm
Length	1500mm
Weight	38kg
Fixings	4, one in each corner

Fixings.

49-FB	M10 x 75mm Coachscrew and Plug
49-CF10	M10 x 75mm Anka Bolt

Installation.

49-FB: Asphalt Surface

Drill 14mm dia x 75mm deep hole into asphalt, tap nylon plug into hole. Wind coachscrew into place

49-CF10: Concrete Surface:

Drill 12mm dia x 100mm deep hole into concrete, clear out dust, insert bolt and tighten.





Scan here to view the webpage.

