

Interlocking Rubber Speed Hump – 50mm.



Suggested Uses.

- Reduce vehicle speed through car parks
- Encourage vehicles to slow down when entering or exiting driveways, entrances, and intersections

Benefits.

- Modular sections interlock for increased strength and quick installation
- Bolt down design – allows for relocation if required.
- Reflective cats eyes enhance visibility.

Useful Tip.

Can be installed either as solid yellow, solid black or alternating yellow/black.

Specifications.

Code	49-SH50
Description	Interlocking Rubber Speed Hump –50mm(H)
Material	Recycled Rubber
Height	50mm
Width	Middle – 500mm / End – 200mm
Length	400mm
Fixings	4 per module, 2 per end cap

Components.

49-SH50-Y	Yellow Module
49-SH50-B	Black Module
49-SH50E-Y	Yellow End Cap
49-SH50E-B	Black End Cap
49-FB	M10 x 75mm Coachscrew and Plug
49-CF10	M10 x 75mm Anka Bolt


Installation.

49-FB: Asphalt Surface

Drill 14mm dia x 75mm deep hole into asphalt, tap nylon plug into hole. Wind coachscrew into place

49-CF10: Concrete Surface:

Drill 12mm dia x 100mm deep hole into concrete, clear out dust, tighten bolt.

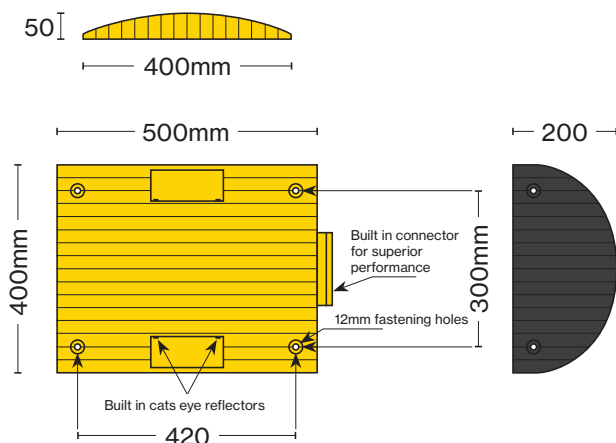

Scan here to view
the webpage.

