

Interlocking Rubber Speed Hump - 75mm.



Suggested Uses.

- Slow down vehicles through car parks
- Encourage vehicles to slow down when entering or exiting driveways, entrances, and intersections

Benefits.

- Creates an aggressive bump, forcing vehicles to slow down to 5-10km/h
- Modular sections interlock for increased strength and quick installation
- Bolt down design - allows for relocation if required.
- Reflective cats eyes enhance visibility.

Useful Tip.

Can be installed either as solid yellow, solid black or alternating yellow/black.

Specifications.

Code	49-SH75
Description	Interlocking Rubber Speed Hump -75mm(H)
Material	Recycled Rubber
Height	75mm
Width	Middle - 500mm / End - 200mm
Length	400mm
Fixings	4 per module, 2 per end cap

Components.

49-SH75-Y	Yellow Module
49-SH75-B	Black Module
49-SH75E-Y	Yellow End Cap
49-SH75E-B	Black End Cap
49-FB	M10 x 75mm Coachscrew and Plug
49-CF10	M10 x 75mm Anka Bolt


Installation.

49-FB: Asphalt Surface

Drill 14mm dia x 75mm deep hole into asphalt, tap nylon plug into hole. Wind coachscrew into place

49-CF10: Concrete Surface:

Drill 12mm dia x 100mm deep hole into concrete, clear out dust, tighten bolt.

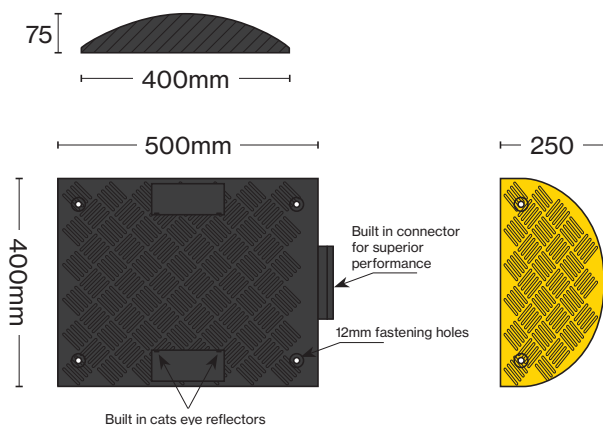

Scan here to view the webpage.

