



Suggested Uses.



- Double vehicle beams, plus top pedestrian rails make this ideal for high-traffic areas where people and larger mass vehicles share the zone.

Benefits.

- Stops 5t at 7.2km/h
- Absorbs energy on impact then returns to its original shape
- Made from a flexible, impact-resistant PE polymer that is 100% recyclable, and can be used in sterile or food safe environments
- UV-resistant and suitable for interior/exterior use
- Tested and certified by German TÜV NORD (DIN EN 1512) Exceeds AS/NZS 1170.1:2002 (Type G)

Specifications.

Code	DFDH-
Description	d-flexx Dual Plus Barrier
Material	PE based Flexible Polymer
Height	1200mm
Post Centres	1530mm
Base Plate	225mm x 225mm x 10mm
Deflection Zone	250mm
Chemical Resistance	High - ISO/TR 10358
Temp. Range	from -10° up to +50° Celsius

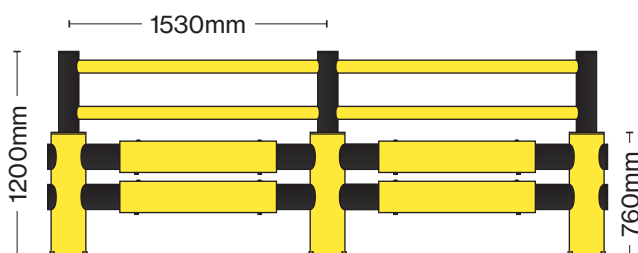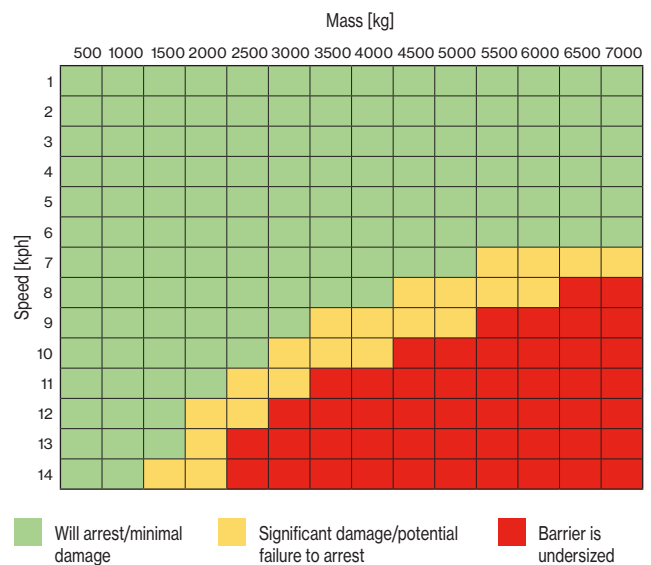

Scan here to view the webpage.

