

Steel Hoop Bollard - Yellow.



Suggested Uses.

- Property and asset protection.
- Create cost effective pedestrian walkways and driver safe zones
- Restrict access to areas

Benefits.

- Versatile bollard and machinery guard
- Hoop design is like having two regular bollards joined together but more cost effective than two bollards.

Specifications.

Code	49-MG12
Description	Steel Hoop Bollard - Yellow
Material	Hot Dipped Galvanised Steel with Safety Yellow Powdercoat
Height	1000mm
Diameter	115mm
Base Plate	200mm x 200mm x 10mm
Weight	30kg
Wall Thickness	5mm
Fasteners	8 (4 per foot)

Fixings.

49-BS12	M12 x 100mm Anka Screw & Washer
---------	---------------------------------


Installation.

Concrete Surface:

Drill 12mm dia x 100mm deep hole into concrete, clear out dust, insert bolt and tighten.

Asphalt Surface

Bollards can not be mounted directly onto an asphalt surface, two concrete footers of 350mm x 350mm x 350mm must be installed first, and then the bollard is mounted to the footings using the concrete screws provided.

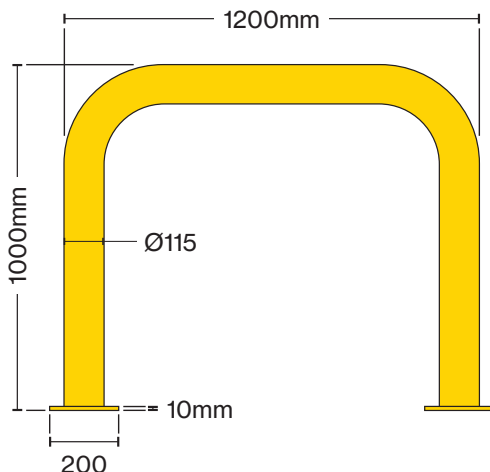

Scan here to view
the webpage.

