

Surface Mount Removable Bollard.



Suggested Uses.

- Where surface mount bollards are required, but need to be removed to allow vehicle access.
- Removable visual deterrent

Benefits.

- Surface mounted - no need to excavate existing surface for installation
- Locks into the surface mounted receiver shoe via an internal locking system.
- Can be removed to allow vehicle access
- 2 keys supplied per bollard

Specifications.

| | |
|----------------|---|
| Code | 49-SMR90 |
| Description | Surface Mount Removable Bollard |
| Material | Hot Dipped Galvanised Steel with Safety Yellow Powdercoat |
| Height | 950mm |
| Diameter | 90mm |
| Base Plate | 170mm x 170mm x 18mm |
| Weight | 7.5kg |
| Wall Thickness | 4.5mm |
| Fasteners | 4 fasteners required per bollard |


Fixings.

| | |
|------------|----------------------|
| 49-CF10100 | M10 x 100 Anka Screw |
|------------|----------------------|

Installation.

Concrete Surface

Drill 10mm dia x 100mm deep hole into concrete, clear out dust, insert bolt and tighten.

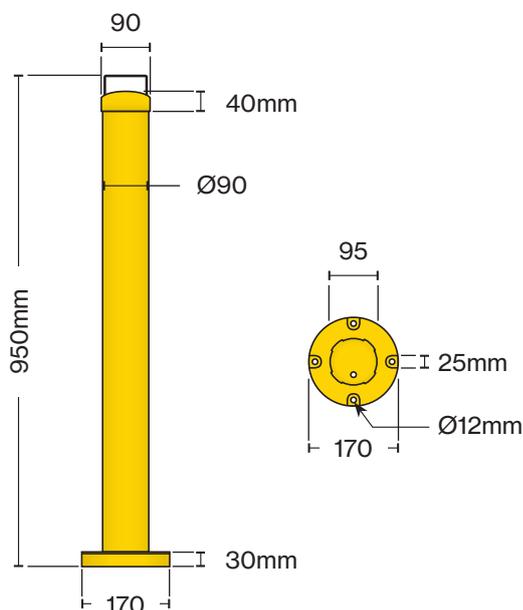

Scan here to view
the webpage.

