

Suggested Uses.



- Used for equipment and storage rack guarding, roller door protection
- Parking facilities, EV Charging stations
- Utility protection and fuel pump protection.

Benefits.

- Stops 3t at 4.5km/h
- Flexible elastomer in the base eliminates floor damage - safe for installation in structural concrete
- Absorbs impact and flexes up to 18.7 degrees before returning to upright position
- Stopping Power Rating: 5,334 joules

Specifications.

Code	49-SSB101Y
Description	Slowstop® Type 2 Bollard
Diameter	101mm
Material	Galvanised Steel with Yellow Powdercoat
Wall thickness	6.3mm
Height	1000mm
Weight	29.5kg
Base Plate Width	250mm
Temperature Rating:	from -40° to +70° Celsius
Fixings	4 (supplied)

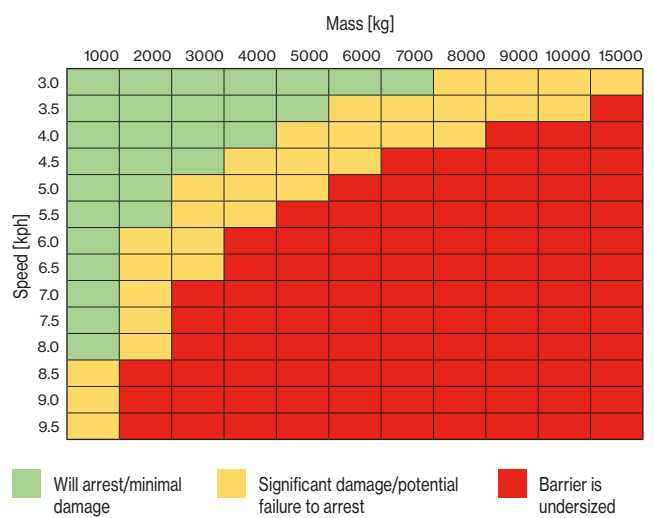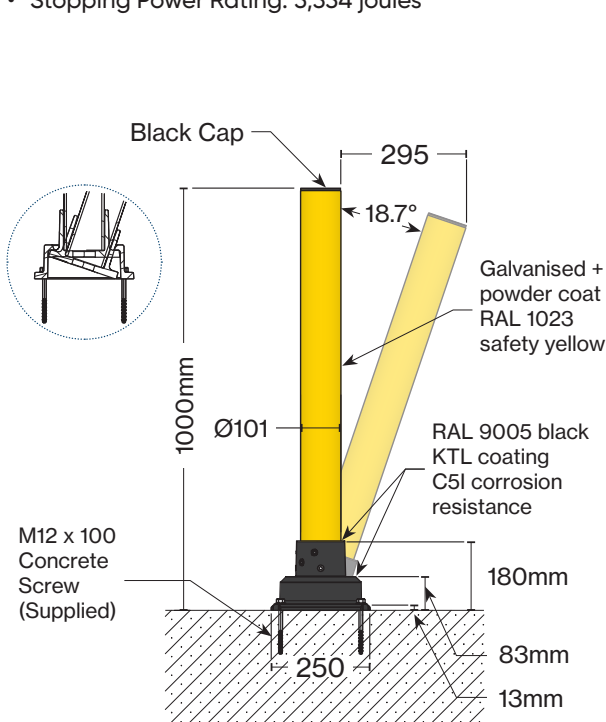


Scan here to view the webpage.




Slowstop® Type 2 Bollard - 101mm Dia.

Diagrams.

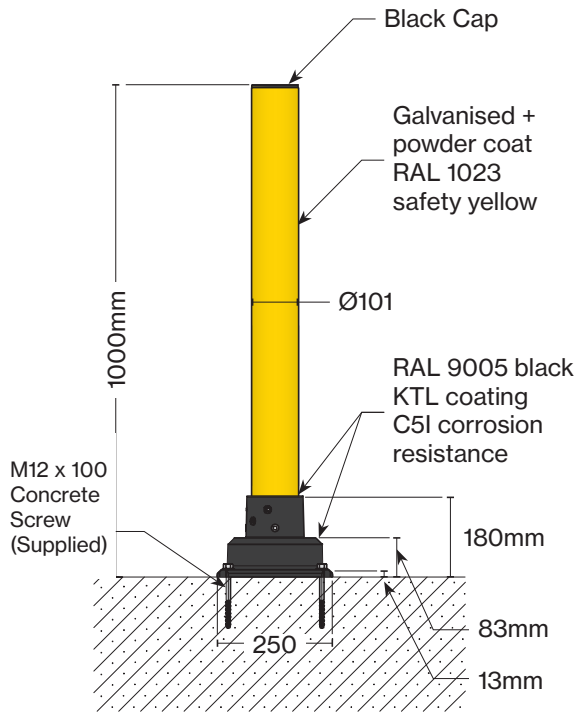

*Minimum foundation depends on local soil conditions, weather & eng. req'ts

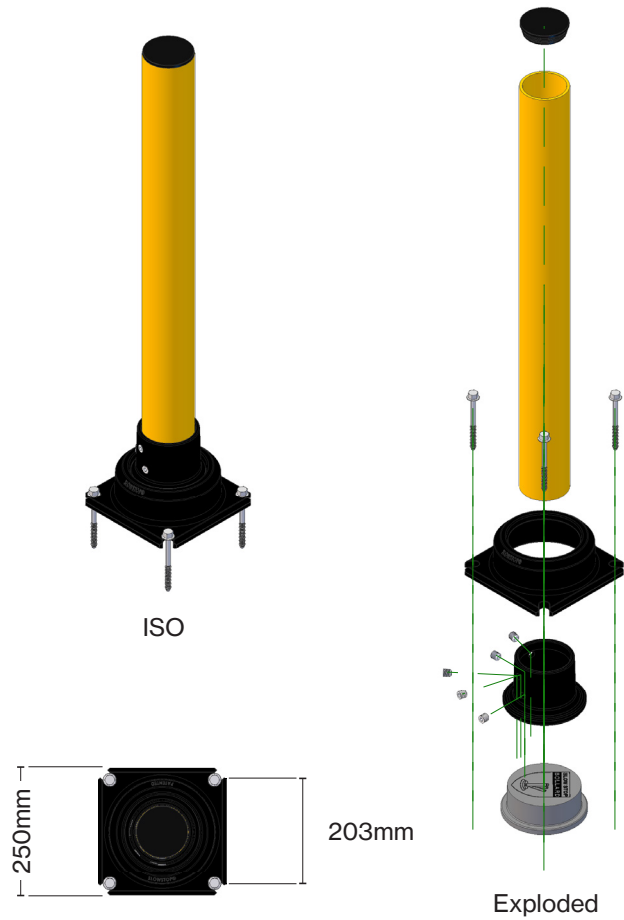

Footing for use in asphalt. Not required in concrete.

