

# Slowstop® Type 3 Bollard - 168mm Dia.



## Suggested Uses.



- Heavy duty applications where large trucks and/or heavy forklifts are present.
- Protect high value assets, building assets and racking protection
- Utility protection and fuel pump protection.

## Benefits.

- Will stop up to 35t travelling 3.1km/h
- Flexible elastomer in the base eliminates floor damage - safe for installation in structural concrete
- Absorbs impact and flexes up to 18.7 degrees before returning to upright position
- Stopping Power Rating: 25,800 joules

## Specifications.

|                     |   |
|---------------------|---|
| Code                | 49-SSB168Y                              |
| Description         | Slowstop® Type 3 Bollard                |
| Diameter            | 168mm                                   |
| Material            | Galvanised Steel with Yellow Powdercoat |
| Wall thickness      | 7.1mm                                   |
| Height              | 1000mm                                  |
| Weight              | 77kg                                    |
| Base Plate Width    | 410mm                                   |
| Temperature Rating: | from -40° to +70° Celsius               |
| Fixings             | 8 (supplied)                            |

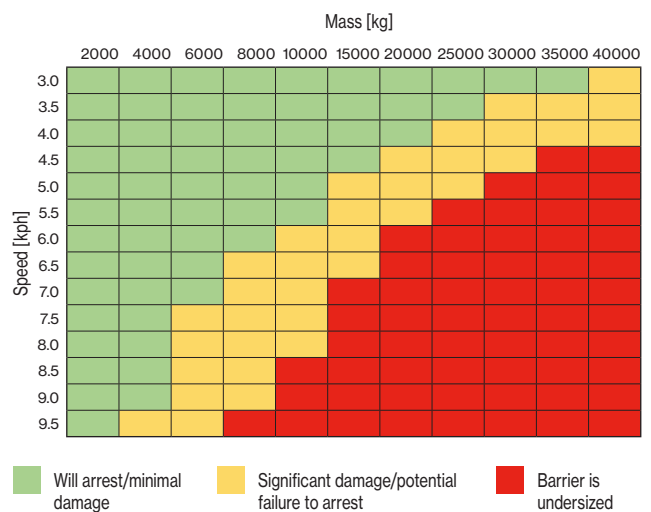
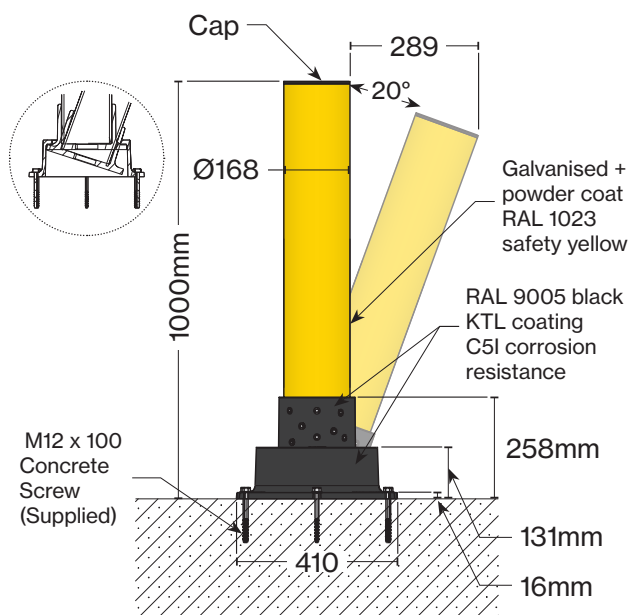


Scan here to view the webpage.



# Slowstop® Type 3 Bollard - 168mm Dia.

## Diagrams.

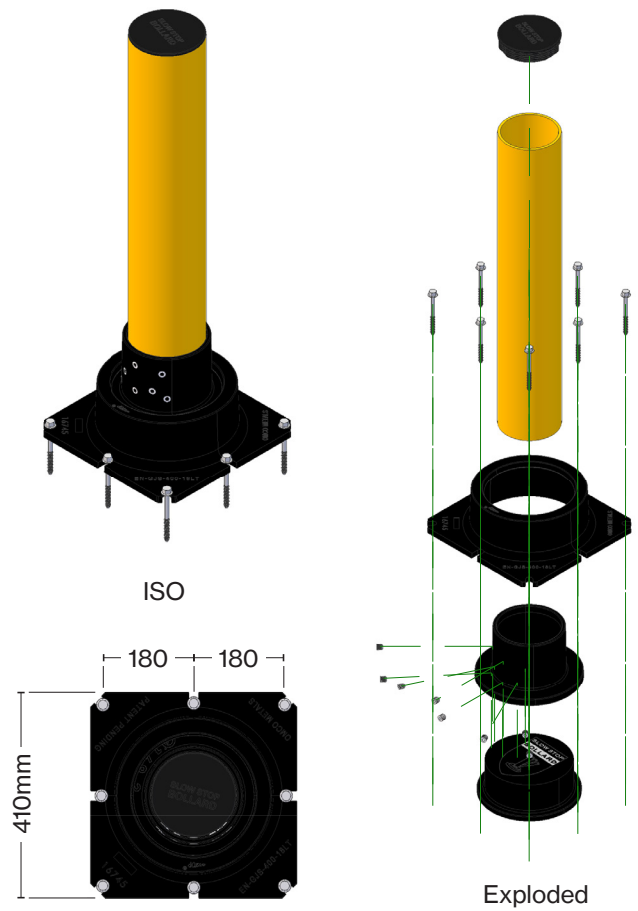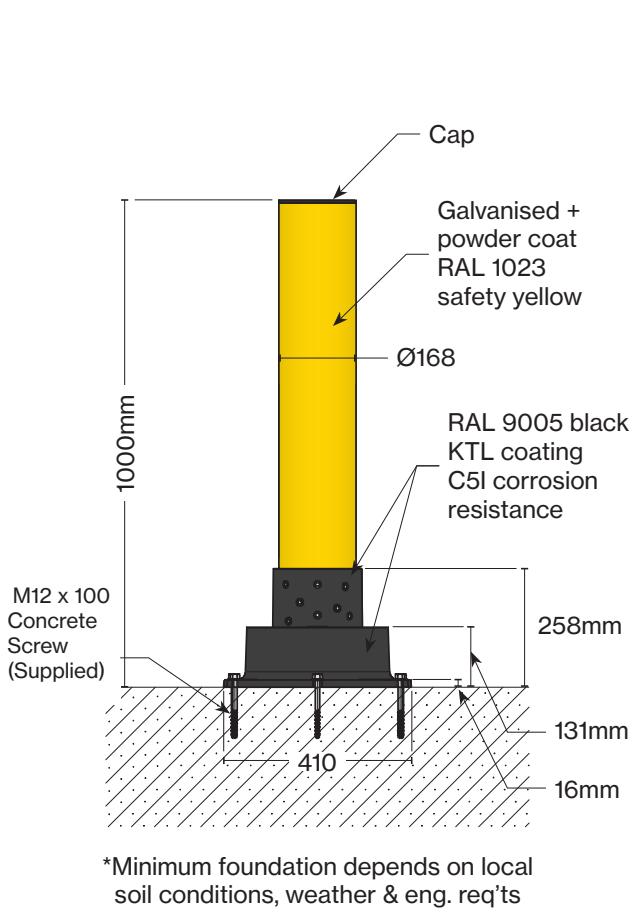

## Footing for use in asphalt. Not required in concrete.

