

Black Rubber Wheel Stop - 1650mm.



Suggested Uses.

- Prevent vehicles from travelling into other parking spaces or surrounding assets, vehicles or people.
- Make your carpark look tidy and professional

Benefits.

- Complies with appropriate standard AS2890.1:2004
- No hi-vis chevrons create a more aesthetically pleasing/subtle look
- One man lift for cost effective and easy installation
- Flexible and will conform to most road surfaces, made from recycled rubber

Useful Tip.

For improved visibility to reduce trip hazards, see 49-RWS-BY black/yellow rubber wheel stop.

Specifications.

Code	49-RWS-B
Description	Rubber Wheel Stop Black - 1650mm
Material	Recycled Rubber
Height	100mm
Width	150mm (at base)
Length	1650mm
Weight	16kg
Fixings	3 per Wheel Stop

Installation.

49-CF12150: Concrete Surface


Drill 12mm dia x 150mm deep hole into concrete, clear out dust, insert bolt and tighten.

49-FR12: Asphalt Surface:

Position the wheel stop, drill 14mm dia pilot hole through the asphalt, then drive spike through.

49-BCA: Adhesive for Concrete or Asphalt:

For use where mechanical fixing is not feasible 1 tube per 2 wheel stops, refer bondurox adhesive installation guide for instructions.

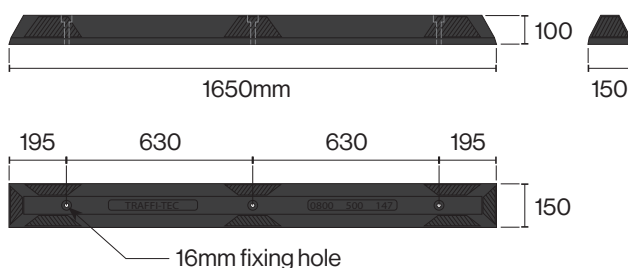

Scan here to view
the webpage.

