



Suggested Uses.

- Alert vehicle operators of pedestrians entering their zone.
- Where visibility is poor in busy environments

Benefits.

- Make pedestrians pause and look before entering a danger zone
- A siren beeps and light flashes when gate is opened providing increased protection for pedestrians in busy and low visibility areas
- Can be mains, battery or solar powered depending on site requirements.

Specifications.

Code	49-WSAP
Description	Walksafe Alert Gate
Material	Hot Dipped Galvanised Steel with Safety Yellow Powdercoat
Height	1800mm
Opening Width	915mm
Base Plate	200mm x 200mm x 8mm
Fixings	4 fixings (not including bollard)

Codes.


49-WSAPL	Walksafe Alert Gate - left mounted
49-WSAPR	Walksafe Alert Gate - right mounted

Fixings.

49-BS12	M12 x 100mm Galvanised Anka Screws
---------	------------------------------------

Installation.

Drill 12mm dia hole into concrete, hole must be 25mm deeper than fixing penetration. Clear out dust. Tighten screw with socket or impact driver.

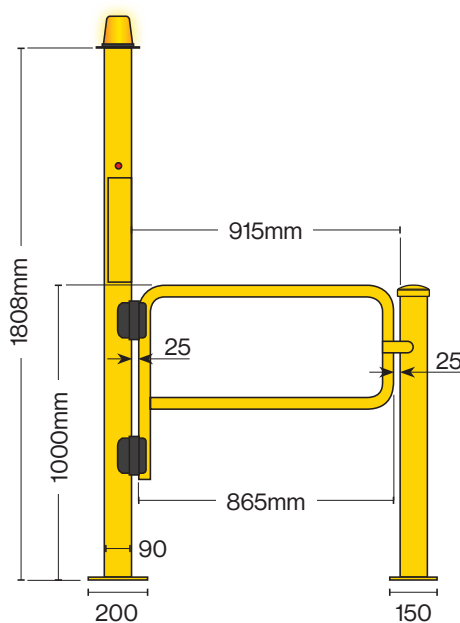

ALERT POST SHOWN WITH 76MM GATE BOLLARD (SOLD SEPARATELY)



Scan here to view the webpage.

