



Suggested Uses.

- Ideal for stairways and steps where slip and fall hazards exist.
- Clearly highlight the edge of each step using yellow nosings, also available in black.
- Ideal for industrial/factory applications


Benefits.

- High quality, durable P5 anti-slip rated surface. Compliant with NZS 4121 and AS/NZS 1428.4.1-2009.
- Bevelled leading edge for non-trip
- Chemical resistant heavy duty grit finish
- Can be supplied pre-drilled and with fasteners for concrete or timber stairs
- Cut to required length (max length 1.8m)

Installation.

Can be supplied pre-drilled and with fasteners for concrete or timber on request.

If fixing to steel, checker plate or other surfaces we supply non drilled without fixings and recommend the client source the best fasteners for their specific installation.

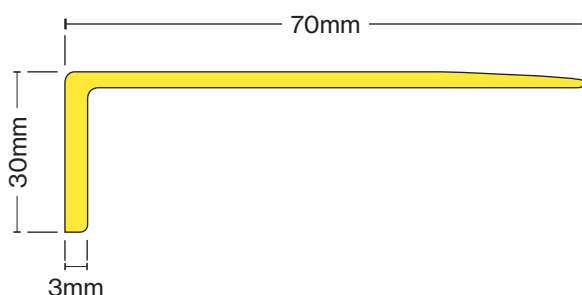

Specifications.

Code	11-FSNM
Description	Fibreglass Anti-Slip Stair Nosing
Material	Carborundum / Fibreglass
Tread Thickness	3mm
Front Drop	30mm
Tread Width	70mm
Fixings	Can be supplied pre-drilled with fasteners for concrete or timber

Codes.

11-FSNM-Y	Fibreglass Anti-Slip Stair Nosing - Yellow
11-FSNM-B	Fibreglass Anti-Slip Stair Nosing - Black
49-BSNF	Bostik Seal N Flex sealant/adhesive 300ml Cartridge - Grey
11-SGC	Fixings for Steel Grating - Grating Clip, Nut and Bolt
49-SMP60	Sabrebond SMP60 adhesive - 290ml cartridge



Scan here to view the webpage.

