


TacBar

Tactile Indicator
Polyurethane Directional Bars

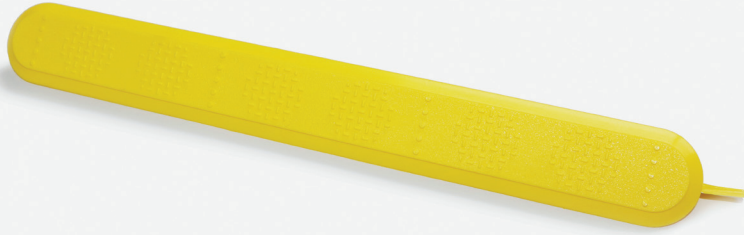

The TacStud Polyurethane Directional Bars are made from hard wearing thermo polyurethane material with added UV stabilizers and have been designed for safety and dignity, while providing superior durability in all substrates.

The retrofit design fixed by engineered shafts for friction fitting into most substrates has meant the TacStud Polyurethane Directional Bars has proven its design and specifications in many harsh conditions and high foot traffic environments.

Standards

The TacStud Polyurethane Directional Bar Indicators comply and exceed the requirements of:

AS/NZS 1428.4.1:2009

NZTA RTS14

NZS 4121:2001

AS/NZS 3661.1.1993

AS/NZS 4586:2004

Types & Applications

- TDIBS10YEL – 300mm strip x 10mm Bladed Shaft strip friction fitted into a 2mm wide x 14mm deep saw cut for Concrete, Timber, Pavers, Tile, Stone Paver Substrates.
- TDIBS15YEL – 300mm strip x 15mm Bladed Shaft strip fitted with epoxy (Hilti RE 500) into Asphalt, Chip Seal Substrates.

Features

- Excellent Anti-Slip Rating
- Easy retro fit install
- UV stable thermos polyurethane
- Superb abrasion qualities

Tactile Colours: Yellow, Black, Grey, White, Green, Blue, Terracotta, Beige, Charcoal



Other colours available on request.

