

115mm Steel Surface Mount Bollard - Yellow.



Suggested Uses.

- Light duty property and asset protection.
- Visual deterrent Retail store-front.
- Mounting Expandable Barriers and Tru-Gard Telescopic Gates.

Benefits.

- Made in New Zealand with 10 Year Warranty
- UV Stabilised Powdercoat
- Black plastic knock on cap
- Compliant with AS/NZS 1170.1 Section 3.8

Specifications.

Code	49-SM115
Description	115mm Steel Surface Mount Bollard
Material	Steel
Height	1100mm
Diameter	115mm
Base Plate	180mm x 180mm x 10mm
Weight	17kg
Wall Thickness	4.5mm
Fasteners	4x M12x100 Concrete Screws


Installation.

Concrete Surface:

Drill 12mm dia x 100mm deep hole into concrete, clear out dust, insert bolt and tighten.

Asphalt Surface

Bollards can not be mounted directly onto an asphalt surface, a concrete footing of 350mm x 350mm x 350mm must be installed first, and then the bollard is mounted to the footing using the concrete screws provided.

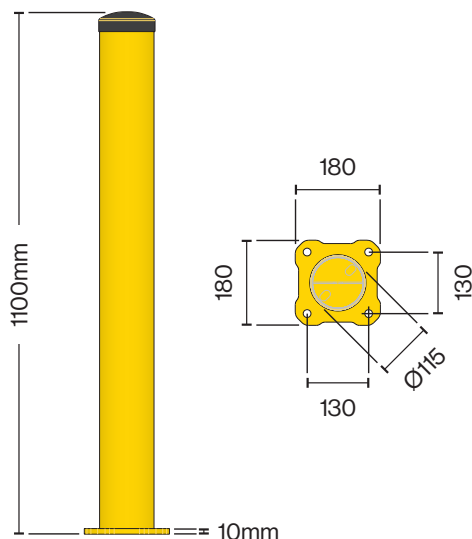

Scan here to view the webpage.

