

GuardSafe® 115mm Inground Bollard

TRAFFIC CONTROL & ASSET PROTECTION





- **Material:** Galvanised steel – 4.5mm wall thickness
- **Finish:** Galvanised or galvanised with yellow powdercoat finish
- **Caps:** To match bollard finish
- **Reinforcing Bars:** Solid Ø12mm steel
- **Other Sizes Available:** Ø165mm and Ø220mm

INSTALLATION GUIDE

- ➔ Cut or core drill hole: minimum 300mm diameter and 550mm deep.
- ➔ Place bollard in hole.
- ➔ Fill with concrete 20mpa or higher.

Note: We recommend mounting bollards 1100mm above ground (and 530mm in the ground), however they can be mounted 1200mm above (and 430mm in the ground).

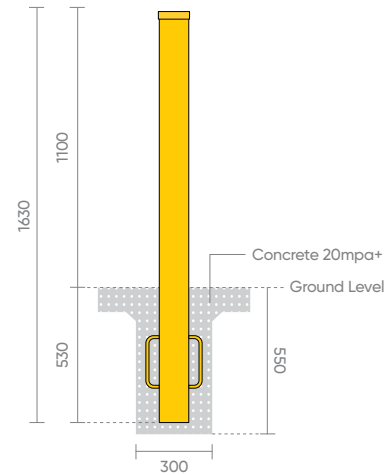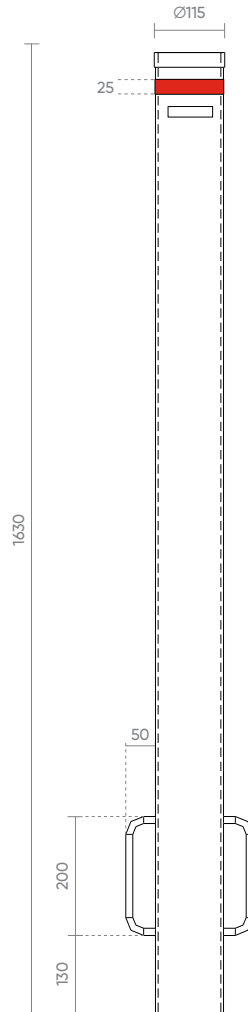

Options

Code	Description	Size (mm)	Height Above Ground (mm)	Weight	Finish
1611-112	GuardSafe Inground Bollard	Ø115 x 1630(H)	1100	22kg	Galvanised
1611-113	GuardSafe Inground Bollard	Ø115 x 1630(H)	1100	22kg	Galv/Yellow

VIEW ONLINE

