

# GuardSafe® 165mm Inground Bollard

## TRAFFIC CONTROL & ASSET PROTECTION





- **Material:** Galvanised steel – 4.5mm wall thickness
- **Finish:** Galvanised or galvanised with yellow powdercoat finish
- **Caps:** To match bollard finish
- **Reinforcing Bars:** Solid Ø12mm steel
- **Other Sizes Available:** Ø115mm and Ø220mm

### INSTALLATION GUIDE

- ➔ Cut or core drill hole: minimum 350mm diameter and 550mm deep.
- ➔ Place bollard in hole.
- ➔ Fill with concrete 20mpa or higher.

**Note:** We recommend mounting bollards 1100mm above ground (and 530mm in the ground), however they can be mounted 1200mm above (and 430mm in the ground).

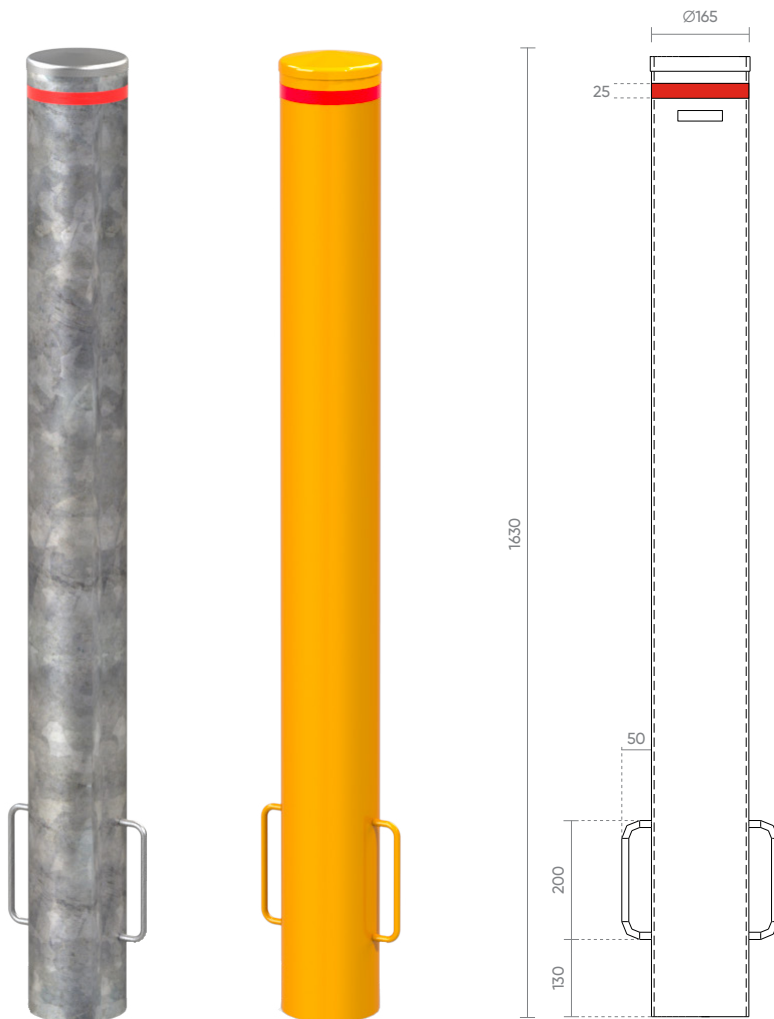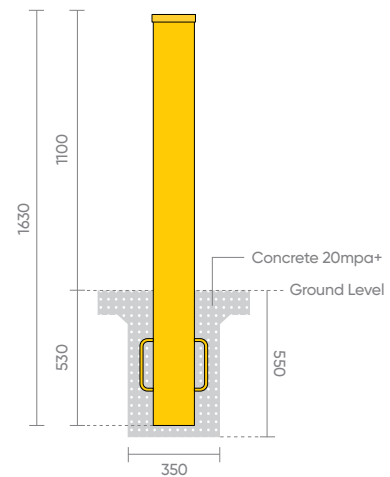

### Options

Code	Description	Size (mm)	Height Above Ground (mm)	Weight	Finish
1611-114	GuardSafe Inground Bollard	Ø165 x 1630(H)	1100	32kg	Galvanised
1611-115	GuardSafe Inground Bollard	Ø165 x 1630(H)	1100	32kg	Galv/Yellow

VIEW ONLINE

