

Stainless Steel Surface Mount Bollards

ASSET PROTECTION & AESTHETIC APPEAL

- **Height:** 1100mm
- **Two Sizes Available:** Ø101mm and Ø152mm
- **Base Plates:** Ø195mm and Ø250mm x 6mm high
- **Material:** 316 marine grade stainless steel – 2mm
- **Finish:** Satin/brushed 320g
- **Fixings:** 4 concrete screws per bollard (not supplied), Ø14mm fixing hole
- **Weight:** 6.5kg and 10kg
- **Application:** Suitable for all interior, exterior and marine environments.

INSTALLATION GUIDE

Concrete Surface:


- ➔ Drill Ø12mm x 100mm deep hole into concrete, clear out dust, insert concrete screw and tighten.

Asphalt Surface:

- ➔ Bollards can not be mounted directly onto an asphalt surface, a concrete footing must be installed first, and then the bollard is mounted to the footing using concrete screws.

Recommended footing sizes:

- Ø101mm: 350(L) x 350(W) x 350(D)mm
- Ø152mm: 400(L) x 400(W) x 400(D)mm

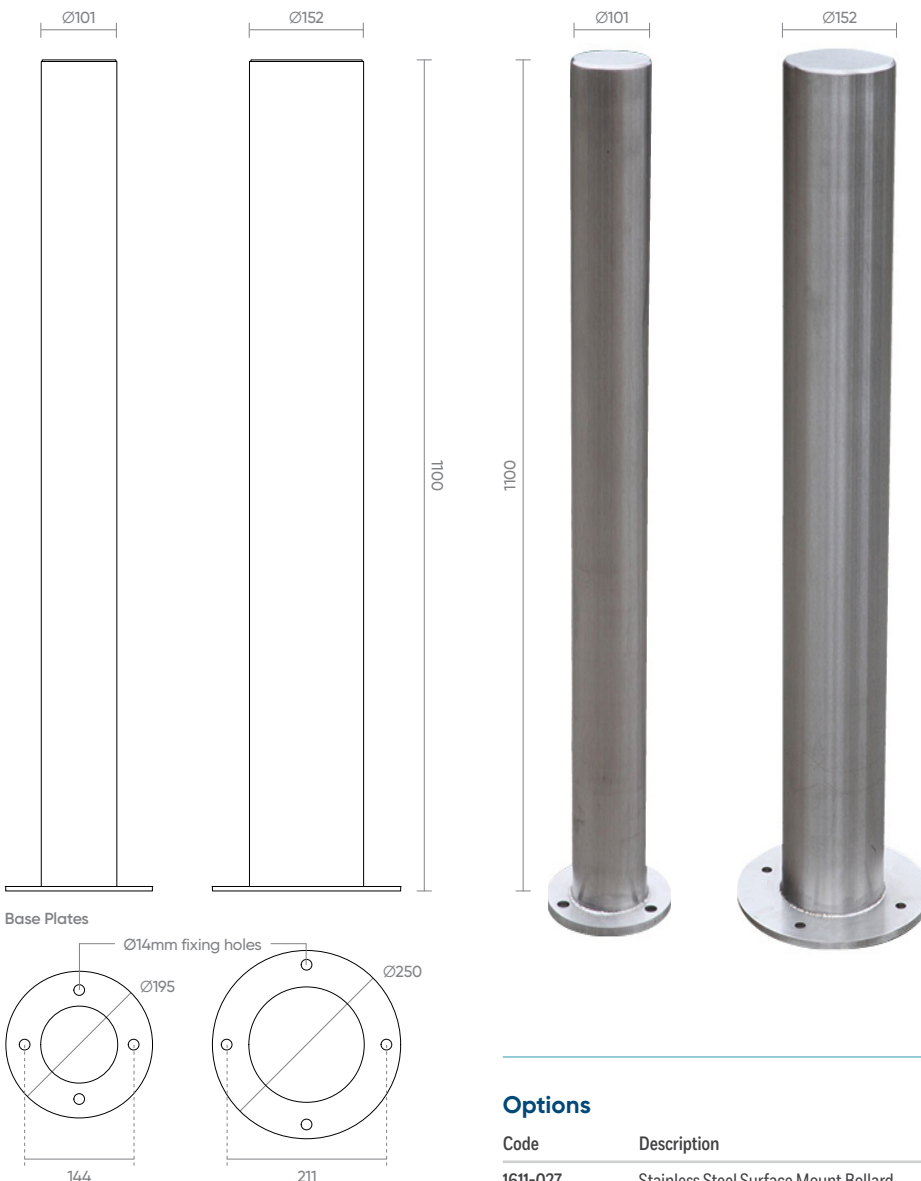

Options

Code	Description	Size (mm)	Weight
1611-027	Stainless Steel Surface Mount Bollard	Ø101 x 1100(H)	6.5kg
1611-028	Stainless Steel Surface Mount Bollard	Ø152 x 1100(H)	10kg
Fixings			
1911-016	M12 x 100mm Concrete Screw, (4 per bollard required)		

VIEW ONLINE

