


Economy Rubber Speed Hump 50mm

SPEED CONTROL & CABLE PROTECTION

- **Height:** 50mm
- **Modular:** Supplied in 1830mm-long centre modules with 150mm end caps
- **Material:** Rubber with textured top surface and underside pockets for surface conformity
- **Recessed Cable Channels:** 2 x 35mm (W) x 25mm (H)
- **Fixings:** 4 per centre module, 1 per end cap
- **Weight:** Centre module 26kg; end caps 1.2kg each.

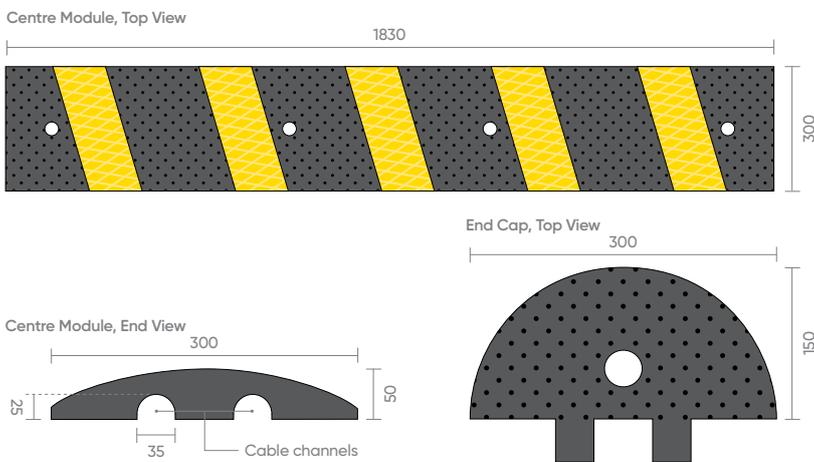

INSTALLATION GUIDE

- ➔ Interlock sections and end caps to achieve the required length.
- ➔ Centre modules can be trimmed to size using a low-speed saw or hand saw.
- ➔ Position the speed hump and drill fixing holes into asphalt or concrete.
- ➔ Secure the speed hump using appropriate fixings for the surface type.
- ➔ The speed hump can be removed and relocated if required.



Components

Code	Description	Size (mm)	Colour	Code	Fixings
2412-001	Centre Module	1830(L) x 300(W) x 50(H)	 Black/Yellow	1911-013	For Asphalt/Bitumen/Chipseal: M12 x 300mm Rebar Spike (4 per module, 1 per end cap)
2412-002	End Cap	150(L) x 300(W) x 50(H)	 Black	1911-035	For Concrete: M10 x 75mm Anka Screw with washer (4 per module, 1 per end cap)

VIEW ONLINE

